


Material Handling

Portable Lifting Hoist and Winch



Specification		
SKU	1609904001	1609904003
Model	SK-160	SK-230
Lifting load top layer (Kg)	160	230
Speed (m/min)	23	14
Motor (KW) 220~240V	1200W / 6A	1300W / 6.5A
Lifting Height (m)	44	29
Wire Rope (dia.x m)	4*45	5*30
Winch Weight (Kg)	17	18
Gross Weight (Kg)	24	25



- Lightweight & compact design allow mounting convenient
- Hoisting is automatically stopped when rope touches the limit arm,
- A sensor arm stops the motor when the rope is reverse winding
- Dynamic brake designs for both static and dynamic loading
- It operates on household power source.
- Plug-in cord allow portability with ease.
- 360 degree universal joint saddle hook with safety latch.
- Built-in safety devices feature for easy control during lifting. Has a wide range of application (warehouse, storage area, construction site, house area, etc.)

GG 18-15B

LIFTING CAPACITY 150 KG
Single Phase Motor



GG 28-30

LIFTING CAPACITY 300 KG
Single Phase Motor



GG 56-50A

LIFTING CAPACITY 500 KG
Single Phase Motor



Specification			
SKU	16099040011	16099040014	16099040019
Model	GG 18-15B	GG 28-30	GG 56-50A
Lifting Capacity	150 Kg	300 Kg	500 Kg
Wire Rope	5mm * 25M	7mm * 30M	8.0mm * 45M
Motor HP x P	0.5HP * 4	1.1HP * 4	1.9HP * 4
Voltage	230V 50/60 Hz	230V 50/60 Hz	230V 50/60 Hz
Speed	12 ~ 18 M/min	12 ~ 18 M/min	18 ~ 23 M/min
Net Weight	23 Kg	36 Kg	79 Kg

Material Handling

Fast Mini Electric Hoist Series



SKU:	16489010800		16489011000	
Model:	PA800A		PA1000A	
Method of use:	Single - hook	Double - hook	Single - hook	Double - hook
Rated volt(v):	230		230	
Input Power:	1300W		1600W	
Rated lifting Weight (kg):	400	800	500	1000
Lifting speed (m/min):	8	4	8	4
Lifting height (m):	12	6	12	6
Qty./CTN (pcs):	2		1	
Packing Size (cm):	52 x 45 x 17		51 x 34 x 18	
G.W./N.W. (kg):	39 / 37		33/ 32	



Hoist Frame for **PA800A**, **PA1000A**,

PA-300L, **PA-500L**

SKU: 16489060600 Model: HST-600-750

SKU: 16489061000 Model: HST-1000-750



Latest European Standard Attestation CE, GS, EMC

Trait: Includes urgent stop switch, reinforced breaking switch with position limit, protection class up to IP54 & thermal prevention device


SKU:	16489020300	16489020500
Model:	PA-300L	PA-500L
Rate load Single/Double (kg):	150 / 300	250 / 500
Voltage(v):	230	230
Input Power:	1300W	1800W
Lifting speed (m/min):	20/10	20/10
Lifting height (m):	12/6	12/6
Qty./CTN (pcs):	2	1
Packing Size (cm):	52 x 25 x 17	51 x 34 x 18
G.W./N.W. (kg):	37 / 39	32 / 33

Material Handling

Fast Mini Electric Hoist Series



Specification		
SKU	16489040250	16489041000
Model	KDJ-500E1	KDJ-1000E1
Load rate (kg)	500	1000
Speed (m/min)	12-18(50Hz)	12-18(50Hz)
Voltage (V)	Three phase 380V,415V	
Motor (KW)	3.0×4	5.5×4
Lifting Height (M)	58	58
Steel Cable (mm×m)	9×60	11×60
N.W. (kg)	136	156
Working rate	93-25% 20min	

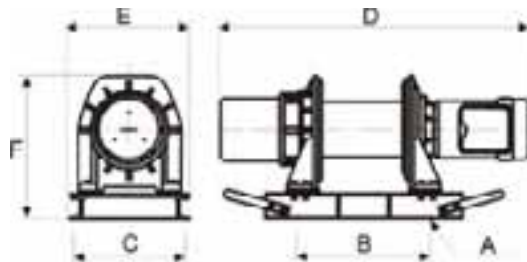

Dimensions in mm		
Symbol	KDJ-500E1	KDJ-1000E1
A	4- (Dia. 16)	4- (Dia. 15)
B	400	400
C	330	330
D	922	935
E	372	372
F	430	430