

# Air Equipment

## Impact Wrench


**MI-5000GL**  
- Long Shank



- Pin-less clutch mechanism
- 2-step throttle for precise control
- Elastomer side handle grip
- 4-position regulator

1"

**MI-2500GL**  
**MI-3800GL**  
- Long Shank

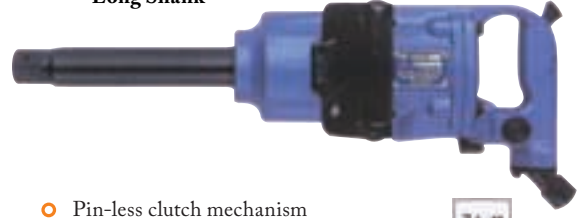

- Pin-less clutch mechanism
- 2-step throttle for precise control
- Elastomer side handle grip
- 4-position regulator
- MI-3800GL - only 1" sq. drive

3/4"

1"



- Pin-less clutch mechanism
- Powerful for extra heavy duty work

1 1/2"

Model	Square Drive	Bolt Size	Torque Range	Max Torque	Net Weight	Overall Length	Free Speed	Avg. Air Consumption		Air Inlet	Hose Size	Shank Size (L)
	(in)	(mm)	(kg.m)	(kg.m)	(kg)	(mm)	(rpm)	(cfm)	(m <sup>3</sup> /min)	(pt)	(in)	(mm)
MI-2500GL	3/4	25	50 - 110	130	9.3	459	5,300	24	0.7	3/8	1/2	150
MI-2500GL	1	25	50 - 110	130	9.3	459	5,300	24	0.7	3/8	1/2	150
MI-3800GL	1	38	50 - 150	200	10.5	505	4,700	35	1.0	1/2	1/2	200
MI-5000GL	1	50	50 - 220	270	16.2	620	3,700	35	1.0	1/2	1/2	230
MI-5500S	1 1/2	55	150 - 420	560	18.0	520	3,600	31	0.9	1/2	1/2	-

Specifications: Air Pressure 6kg/cm<sup>2</sup>

Torque: 1.0kg.m = 9.807N.m = 7.233 ft.lb



# Air Equipment

## Impact Wrench - 1/2" to 1" square drive




**MI-17HEL**  
- Long Shank



**MI-17HE**  
- Short Shank

- Twin-Hammer clutch mechanism
- Balance-body weight distribution
- Tease throttle for precise control
- 4-position regulator

1/2"



**MI-20PL**  
- Long Shank



**MI-20P**  
Short Shank

- Twin Hammer Clutch - Lighter weight & higher power
- Tease throttle for precise control
- Durable ratchet head for long life
- 360° free rotating exhaust
- Well balanced ergonomic design reduce operator's fatigue
- 4-position regulator
- One hand easy reverse switch

3/4"



**MI-2500PL**  
**MI-3800PL**  
- Long Shank




**MI-2500P**  
**MI-3800P**  
- Short Shank

- Pin-less clutch mechanism
- 2-step throttle for precise control
- Elastomer side handle grip
- 360° free rotating exhaust
- 4-position regulator
- MI-3800P - only 1" sq. drive

3/4"

1"



**MI-5000PL**  
- Long Shank



**MI-5000P**  
- Short Shank

- Pin-less clutch mechanism
- 2-step throttle for precise control
- Elastomer side handle grip
- 360° free rotating exhaust
- 4-position regulator

1"

Model	Square Drive	Bolt Size	Torque Range	Max Torque	Net Weight	Overall Length	Free Speed	Avg. Air Consumption		Air Inlet	Hose Size	Shank Size (L)
	(in)	(mm)	(kg.m)	(kg.m)	(kg)	(mm)	(rpm)	(cfm)	(m <sup>3</sup> /min)	(pt)	(in)	(mm)
MI-17HE	1/2	16	25 - 45	R55 L60	2.4	176	5,500	18	0.5	1/4	1/2	-
MI-17HEL	1/2	16	25 - 45	R55 L60	2.6	232	5,500	18	0.5	1/4	1/2	73
MI-20P	3/4	22	40 - 80	100	3.9	220	5,000	24	0.7	3/8	1/2	-
MI-20PL	3/4	22	40 - 80	100	4.6	340	5,000	24	0.7	3/8	1/2	150
MI-2005P	3/4	25	50 - 110	130	8.2	265	5,300	24	0.7	3/8	1/2	-
MI-2005PL	3/4	25	50 - 110	130	9.3	386	5,300	24	0.7	3/8	1/2	150
MI-2005P	1	25	50 - 110	130	8.5	286	5,300	24	0.7	3/8	1/2	-
MI-2005PL	1	25	50 - 110	130	9.3	386	5,300	24	0.7	3/8	1/2	150
MI-3800P	1	38	50 - 150	200	9.5	276	4,700	35	1.0	1/2	1/2	-
MI-3800PL	1	38	50 - 150	200	10.8	430	4,700	35	1.0	1/2	1/2	200
MI-5000PL	1	50	50 - 220	270	16.2	620	3,700	35	1.0	1/2	1/2	230

Specifications: Air Pressure 6kg/cm<sup>2</sup>

Torque: 1.0kg.m = 9.807N.m = 7.233 ft.lb